CONNECTED ACCESS PORTAL, HIGH CAPACITY





Smart Access Control Software

COLOR TOUCH DISPLAY 10", 720p High-Def Interface

Easy Setup and Programming

SMART

INTUITIVE INTERFACE WITH COLOR TOUCH DISPLAY FOR SUPERIOR RESIDENT AND GUEST USABILITY.

CUSTOMIZABLE BACKGROUND ON A 10", FULL-COLOR, 720p HIGH-DEFINITION SCREEN.

REMOTE PROGRAMMING AND ACTIVITY MONITORING USING LIFTMASTER CLOUD.

CONFIGURABLE EMAIL NOTIFICATIONS KNOW WHEN CODES ARE OVERUSED OR IF SERVICE IS NEEDED FOR THE CAPXL, CAP2D OR GATE OPERATOR.

ELIMINATE TRENCHING WITH WI-FI® AND WIRELESS LINK TO LIFTMASTER® GATE OPERATORS.

RELIABLE

VOICE OVER IP (VOIP) PROVIDES CRYSTAL-CLEAR CALL QUALITY WITH NO LONG-DISTANCE CHARGES.

STAINLESS STEEL FOR A MODERN, DURABLE DESIGN.

LOCAL SYSTEM MEMORY ALLOWS RESIDENTS TO ENTER EVEN WHEN THE INTERNET IS DOWN.

SECURE

GET ALERTED WHEN A SUSPENDED CODE IS USED OR IF AN ACTIVE CODE IS BEING OVERUSED.

REAL-TIME ACTIVITY TRACKING WITH LIFTMASTER CLOUD.

CLOUD-BASED SECURITY KEEPS DATA PROTECTED AND SAFEGUARDS RESIDENT INFORMATION.

Cloud-based access control for residential communities.

TOTAL SOLUTION ACCESSORIES:

CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER

Cloud-based, credentialed access control.



CELLULAR 4G/LTE MODEM WITH WI-FI

Makes it easy to connect CAPXL and CAP2D(s) anywhere.



TRIM KIT AND BACK KIT

Conceal openings left from other systems in flush-mount, infinity L and icon installations.



CAPXLTK

PASSPORT REMOTE CONTROLS

PPV3M/PPK3PHM/PPLK1-X Visor and keychain remotes with unique credentialed IDs.



multiCLASS® SE RP10 MINI MULLION

Proximity reader for credentialed access.



LMMC-MINI



Proximity card for credentialed access.



ELEVATOR ACCESS CONTROL

CAPB485/CAPDC485/CAPRELAY Integrated elevator access and control.



ANTENNA MOUNTING KIT

For extended range or remote mounting for radios or Wi-Fi.



GATE OPERATORS

CSW24U/CSL24U/HCTDCU Ensure quick and safe access for residential communities. Pair with CAPXL for remote system diagnostics.





HIGH CAPACITY

ELECTRICAL

MASTERFUL ENGINEERING.

CONNECTED ACCESS PORTAL,

CAPACITIES



- -4 Controlled Gates/Doors
- -Wireless Link for up to 8 LiftMaster® Operators
- -4 to 8 Digit Entry Codes
- -4 to 6 Digit Directory Codes
- -50,000 Local Resident Capacity
- -50,000 Local Event History
- -Multiple, Holiday and Hold-Open Scheduling, Including One-Time and Repeating Exceptions

POWER



- -Input 120V AC (Transformer Included)
- UL® Listed

-CAPXL:

- Relay Outputs 3 Amps

DIMENSIONS




- 18" x 14" x 4.5"
- -CAPXLTK (Outer Trim): 23.75" x 19.375"

8 II

MECHANICS



- -10", 720p High-Definition Touch Display
- -Fade- and Glare-Resistant Display
- Outdoor Stainless-Steel Housing
- -Built-In Security+ 2.0® Radio
- Postal Lock Provision
- Surface, Flush (CAPXLTK) or Pedestal (PED42, PED64) Mount
- Camera Ready; Use Any Standard Pinhole Camera

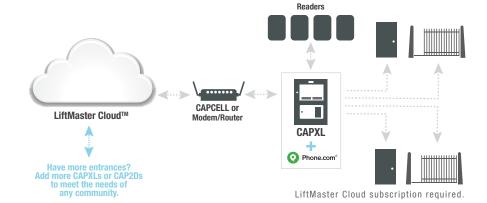

STANDARD SPECS.

COMMUNICATION INTERNET (DYNAMIC OR STATIC IP)

- -Wi-Fi®
- High Speed
- -DSL with at Least 1 MB Download Speed
- Cellular (Optional CAPCELL)

VOICE

- VoIP (Voice over IP)
- Phone.com® Service Required for VoIP

ONBOARD RADIO

- Security + 2.0 for Passport Remote Controls
- Wireless Link to UL 325 Gate Operators Manufactured After October 2017
- Retrofit Kits Will Be Available for Operators Manufactured Between January 2016 and October 2017
- HomeLink® IV and V Compatible*

WARRANTY

-2-Year

INPUT PORTS

- 4 Wiegand Inputs
- 4 Request-to-Exit (REX) Inputs
- 4 Supervised Inputs
- 1 Auto-Call Input (Requires LPEXP)

OUTPUTS

- 4 Primary Relays
- -4 Auxiliary Relays
- -1 Wiegand Output

OPERATING -20°F to 130°F (-29°C to 54°C)

SHIPPING.

SHIPPING WEIGHT (in lbs.)



CARTON (1)

23" x 18" x 9"

- CAPXL
- 24V DC Power Supply
- 2 Keys
- Radio Antenna
- Wi-Fi Antenna
- Misc. Hardware

For Support Tools and Training Videos, Visit **LiftMasterTraining.com**

For More Information, Visit LiftMaster.com/AccessControl

Sales Support: **800.282.6225**

Technical Support Center: 800.528.2806
LiftMasterDealer.CustHelp.com/App/Ask





^{*}Requires HOA or Management Assistance